


50 psi Heavy Duty Compressor

What is a heavy duty compressor used for?

A heavy duty compressor is capable of compressing air up to 50 pounds per square inch (psi) to power aerosol devices.

How to use and adjust the compressor

1. Plug into a grounded outlet.
2. Wash hands before handling nebulizers or solutions.
3. Turn the pressure control knob fully counterclockwise.
NOTE: As the knob is turned counter-clockwise the pressure will decrease, as the knob is turned clockwise the pressure will increase.
4. Attach the nebulizer tubing to the outlet port.
5. Turn the ON/OFF switch to the ON position.
6. Adjust the pressure.
7. Proceed with therapy per physician's instructions.
In most situations, the pressure on gauge should be in the 30 - 50 psi range when turned on.

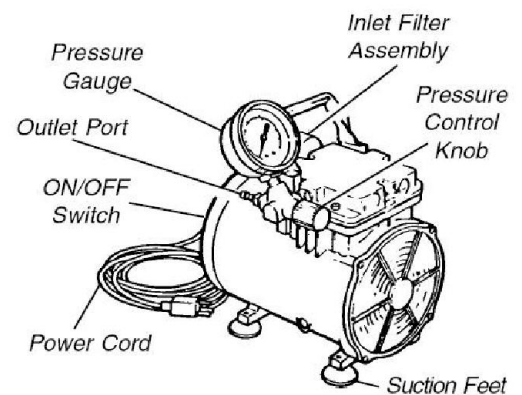

Maintenance

- Check the filters at least once each month.
- If the compressor begins to lose pressure in normal use, check the air filters.
 - Remove the filter cap from the Inlet Filter Assembly.
 - If the foam filter appears dirty, wash with mild detergent and water. Rinse thoroughly and let air dry.
- DO NOT wash the felt filter. Water damages the felt filter.
- Replace the felt filter if it appears dark in color, becomes clogged, or is damaged.
- DO NOT operate this compressor without filters installed.

Safety

- DO NOT pump anything other than atmospheric air.
- NEVER operate this product outdoors in the rain or in a wet area.
- DO NOT use this product near flames.
- DO NOT use the compressor for continuous operation more than 10 hours; this can result in overheating and damage to the compressor.
- DO NOT use this product in or near explosive atmospheres or where aerosol (spray) products are being used.
- DO NOT pump combustible liquids or vapors with this product or use in or near an area where flammable or explosive liquids or vapors may exist.

Safety

- Close supervision is necessary when this product is used near children.
- NEVER block any air openings (inlet) of the product or place it on a soft surface where the opening may be blocked. Keep all air openings free of lint, dirt and other foreign objects.
- DO NOT operate this product in an oxygen enriched environment, i.e. oxygen tent or oxygen hood.
- Use only in well ventilated areas.
- 50 PSI compressors are used to compress Room Air. These units are used in the home for the purpose of providing power to nebulizers. The nebulizer produces large amounts of humidity (moisture) which is delivered through an aerosol mask or tracheostomy collar for patients who do not have enough moisture in their airways.
- 50 PSI compressors are capable of producing between 25 – 55 PSIG (pounds per square inch, gauge). This amount of pressure is required to power the nebulizer.
- Unit should be plugged in to a 110 volt grounded wall outlet.
- Nebulizer bottle should be placed onto the outlet port of the 50 PSI compressor.
- A 7 foot “large bore tubing” (corrugated hose) is then connected at the outlet port of the nebulizer bottle.
- The patient interface (i.e. trach collar, aerosol mask) is attached to the hose.
- The power switch is usually on the front of the machine. Use the power switch to turn the machine on and off.
- To regulate the amount of moisture from the nebulizer, adjust the moveable “collar” on the top of the lid to the jar. This will allow more or less air to enter the jar and thus increase or decrease the amount of moisture created. In the event the compressor does not produce adequate mist for humidification, check that the nebulizer jar is not cross-threaded.

Cleaning

1. To clean the nebulizer jar: Empty and rinse daily. Add new distilled water to the fill line. At the end of each day; empty the jar, wash with soap and water, rinse well. Disinfect with 1 part white vinegar to 4 parts water and allow to air dry. If using continuously, put the spare jar in use, while the just cleaned jar is drying.
2. The large particle filter should be cleaned at least once each week. Brush off any dust or dirt that has accumulated. Rinse with warm, soapy water, then rinse with clear water until all the soap is removed. Dry thoroughly before putting back in use. If using the compressor continuously, use a spare filter while cleaning and drying the filter that is in use.

Warranty

If you have purchased the compressor, the warranty is for one year beginning with the date of original set-up.